






C-STFC  
E-STFC  
L-STFC

91°

## E-STFC



## L-STFC

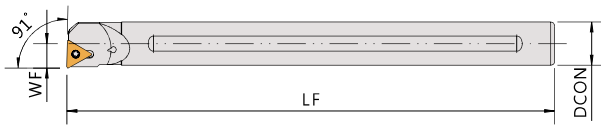

C-Carbide Shank 錫鋼柄

E-Carbide Shank with Coolant 油孔錫鋼柄

L-Anti-vibration Shank with Coolant 油孔耐震刀柄

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
C08K-STFCR09-10	TCMT0902	8	5	125	10	15°	CS22050	FT-7
C10M-STFCR09-12		10	6	150	12	13°		
C12Q-STFCR09-14		12	7	180	14	10°		
C12Q-STFCR11-14	TCMT1102	12	7	180	14	10°	CS25060	FT-7
C16R-STFCR11-18		16	9	200	18	8°		
C20S-STFCR11-22		20	11	250	22	6°		
C25T-STFCR16-28		25	14	300	28	6°		
E08M-STFCR09-10	TCMT0902	8	5	150	10	15°	CS22050	FT-7
E10Q-STFCR09-12		10	6	180	12	13°		
E12R-STFCR11-14	TCMT1102	12	7	200	14	10°	CS25060	FT-7
E16R-STFCR11-18		16	9	200	18	8°		
E20S-STFCR11-22		20	11	250	22	6°		
E25T-STFCR16-28		25	14	300	28	6°		
L08K-STFCR09-10	TCMT0902	8	5	125	10	15°	CS22050	FT-7
L10K-STFCR11-12	TCMT1102	10	6	125	12	13°	CS25060	FT-7
L12M-STFCR11-14		12	7	150	14	10°		
L16R-STFCR11-18		16	9	200	18	8°		

💧 A- Steel shank with coolant  
亦可做中心出水鋼柄