



C-STUB/P
E-STUB/P


93°

C-STUB

E-STUB

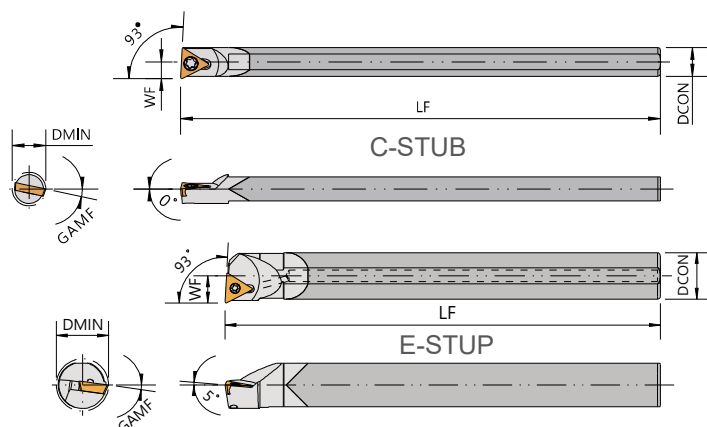

E-STUB



E-STUB

C-Carbide Shank 鎢鋼柄

E-Carbide Shank with Coolant 油孔鎢鋼柄

Order No.	Insert	Dimensions(mm)					Parts	Wrench
Right / Left		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
C06H-STUBR06-07	TBMT0601	6	3.5	100	7	12°	CS20038	FT-6
C08K-STUBR06-08		8	4	125	8	10°	CS20038	FT-6
C08K-STUPR08-10	TPGT0802	8	5	125	10	10°	CS20045	FT-6
C10M-STUPR08-12		10	6	150	12	8°	CS20045	FT-6
C08K-STUPR09-10	TPMT0902	8	5	125	10	10°	CS25055	FT-8
C10M-STUPR09-12		10	6	150	12	8°	CS25065	FT-8
C10M-STUPR11-12	TPMT1103	10	6	150	12	8°	CSA30060	FT-10
C12Q-STUPR11-14		12	7	180	14	7°	CSA30060	FT-10
C16R-STUPR11-18		16	9	200	18	4°	CSA30070	FT-10
C20S-STUPR11-22		20	11	250	22	2°	CSA30070	FT-10
C20S-STUPR16-22	TPMT1604	20	11	250	22	2°	CS40090	FT-15
C25T-STUPR16-28		25	14	300	28	2°	CS40090	FT-15
E06K-STUBR06-07	TBMT0601	6	3.5	125	7	12°	CS20038	FT-6
E08M-STUPR08-10	TPMT0802	8	5	150	10	10°	CS20045	FT-6
E10Q-STUPR08-12		10	6	180	12	8°	CS20045	FT-6
E10Q-STUPR09-12	TPMT0902	10	6	180	12	8°	CS25065	FT-8
E10Q-STUPR11-12	TPMT1103	10	6	180	12	8°	CSA30060	FT-10
E12R-STUPR11-14		12	7	200	14	7°	CSA30060	FT-10
E16R-STUPR11-18		16	9	200	18	4°	CSA30070	FT-10
E20S-STUPR11-22		20	11	250	22	2°	CSA30070	FT-10
E20S-STUPR16-22	TPMT1604	20	11	250	22	2°	CS40090	FT-15
E25T-STUPR16-28		25	14	300	28	2°	CS40090	FT-15

A- Steel shank with coolant
亦可做中心出水鋼柄