

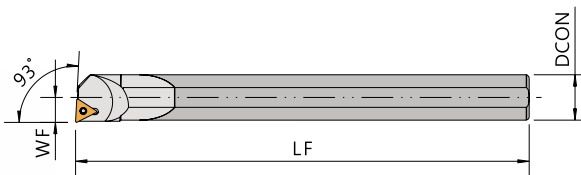


C-STUC
E-STUC

93°

C-Carbide Shank 鎢鋼柄
E-Carbide Shank with Coolant 油孔鎢鋼柄



Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
C08K-STUCR09-10	TCMT0902	8	5	125	10	15°	CS22050	FT-7
C10M-STUCR09-12		10	6	150	12	13°	CS22050	FT-7
C10M-STUCR11-12	TCMT1102	10	6	150	12	13°	CS25061S	FT-7
C12Q-STUCR11-14		12	7	180	14	10°	CS25061S	FT-7
C16Q-STUCR11-18		16	9	180	18	8°	CS25061S	FT-7
C16R-STUCR11-18		16	9	200	18	8°	CS25061S	FT-7
C20R-STUCR11-22		20	11	200	22	6°	CS25061S	FT-7
C20S-STUCR1102-22		20	11	250	22	6°	CS25061S	FT-7
C20R-STUCR16		TCMT16T3	20	11	200	22	6°	CS35090
C25T-STUCR16	25		14	300	28	6°	CS35090	FT-15
E20R-STUCR16-22	TCMT16T3	20	11	200	22	6°	CS35090	FT-15

A- Steel shank with coolant
亦可做中心出水鋼柄