

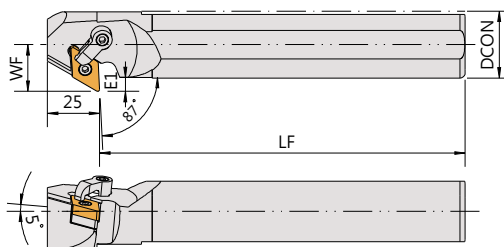


S-MDZN

87°






亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)						Parts				Wrench
		柄徑 DCON	工作寬度 WF	切深 E1	長度 LF	最小加工徑 DMIN	徑向前角 GAMF					
S32S-MDZNR/L15	DNMG1504-SMD463	32	22	6	250	40	17°	SMD-4X3	LCS-619	CP50-24	CS7-6024	LW030
S40T-MDZNR/L15	DNMG1506-SMD443	40	27	7	300	50	15°	SMD-4X3	LCS-619	CP50-24	CS7-6030	LW030
S50U-MDZNR/L15	SMD443	50	35	10	350	63	12°	SMD-4X3	LCS-619	CP50-24	CS7-6030	LW030



S-MSKN

75°

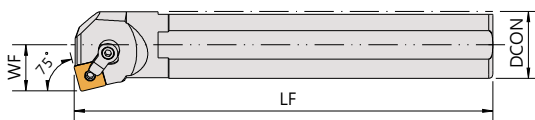

Order No.	Insert	Dimensions(mm)					Parts				Wrench	
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF						
S20R-MSKNR/L12	SNMG1204	20	13	200	25	17°	-	LCS-511	CP50-26	CS7-5018	LW025	-
S25R-MSKNR/L12		25	17	200	32	14°	-	LCS-511	CP50-22	CS7-6024	LW025	LW030
S32S-MSKNR/L12		32	22	250	40	14°	SMS-432	LCS-617	CP50-22	CS7-6030	-	LW030
S40T-MSKNR/L12		40	27	300	50	15°	SMS-432	LCS-617	CP50-22	CS7-6030	-	LW030
S50U-MSKNR/L12		50	35	350	63	12°	SMS-432	LCS-617	CP50-22	CS7-6030	-	LW030
S40T-MSKNR/L15	SNMG1506	40	27	300	50	15°	SMS-533	LCS-0822	CP50-22	CS7-6030	-	LW030
S50U-MSKNR/L19	SNMG1906	50	35	350	63	8°	SMS-633	LCS-1022	CP50-29	CS7-8030	-	LW030

亦可做中心出水鋼柄
A- Steel shank with coolant