

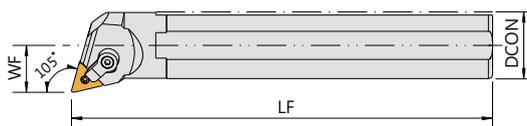


亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts				Wrench	
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF	△	🔧	🔧	🔧	└┘	
S20R-MTFNR/L16	TNMG1604	20	13	200	25	17°	-	LCS-510	CP50-26	CS7-5018	LW020	LW025
S20T-MTFNR/L16		20	13	300	25	17°	-	LCS-510	CP50-26	CS7-5018	LW020	LW025
S25R-MTFNR/L16		25	17	200	32	12°	-	LCS-510	CP50-22	CS7-6024	LW020	LW030
S32S-MTFNR/L16		32	22	250	40	10°	SMT-322	LCS-513	CP50-22	CS7-6024	LW020	LW030
S40T-MTFNR/L16		40	27	300	50	10°	SMT-322	LCS-513	CP50-22	CS7-6030	LW020	LW030
S50U-MTFNR/L16		50	35	350	63	8°	SMT-322	LCS-513	CP50-22	CS7-6030	LW020	LW030
S40T-MTFNR/L22	TNMG2204	40	27	300	50	15°	SMT-433	LCS-617	CP50-28	CS7-8030	LW030	LW040
S50U-MTFNR/L22		50	35	350	63	12°	SMT-433	LCS-617	CP50-28	CS7-8030	LW030	LW040



Order No.	Insert	Dimensions(mm)					Parts				Wrench	
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF	△	🔧	🔧	🔧	└┘	
S20R-MTQNR/L16	TNMG1604	20	13	200	25	15°	-	LCS-510	CP50-26	CS7-5018	LW020	LW025
S25R-MTQNR/L16		25	17	200	32	12°	-	LCS-510	CP50-22	CS7-6024	LW020	LW030
S32S-MTQNR/L16		32	22	250	40	17°	SMT-322	LCS-513	CP50-22	CS7-6024	LW020	LW030
S40T-MTQNR/L16		40	27	300	50	15°	SMT-322	LCS-513	CP50-22	CS7-6030	LW020	LW030
S50U-MTQNR/L16		50	35	350	63	12°	SMT-322	LCS-513	CP50-22	CS7-6030	LW030	LW030

亦可做中心出水鋼柄
A- Steel shank with coolant