

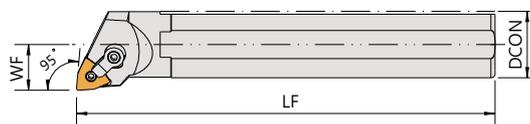


亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts					Wrench	
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF	△	🔩	🔩	🔩	🔩	🔩	🔩
S16Q-MTWNRL/16	TNMG1604	16	11	180	20	20°	-	LCS-510	CP50-26S	CS7-5018	LW020	LW025	
S20R-MTWNRL/16		20	13	200	25	17°	-	LCS-510	CP50-26	CS7-5018	LW020	LW025	
S25R-MTWNRL/16		25	17	200	32	12°	-	LCS-510	CP50-22	CS7-6024	LW020	LW030	
S32S-MTWNRL/16		32	20	250	40	10°	SMT-322	LCS-513	CP50-22	CS7-6024	LW020	LW030	
S40T-MTWNRL/16		40	24	300	50	15°	SMT-322	LCS-513	CP50-22	CS7-6030	LW020	LW030	
S50U-MTWNRL/16		50	29	350	57	12°	SMT-322	LCS-513	CP50-22	CS7-6030	LW020	LW030	



亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts					Wrench	
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF	△	🔩	🔩	🔩	🔩	🔩	🔩
S16Q-MWLNR/L06	WNMG0604	16	11	180	22	18°	-	LCS-510	CP50-26	CS7-5018	LW020	LW025	
S20S-MWLNR/L06		20	13	250	25	17°	-	LCS-510	CP50-26	CS7-5018	LW020	LW025	
S20R-MWLNR/L08	WNMG0804	20	13	200	25	17°	-	LCS-511	CP50-26	CS7-5018	-	LW025	
S20S-MWLNR/L08		20	13	250	25	17°	-	LCS-511	CP50-26	CS7-5018	-	LW025	
S20T-MWLNR/L08		20	13	300	25	17°	-	LCS-511	CP50-26	CS7-5018	-	LW025	
S25R-MWLNR/L08		25	17	200	32	14°	-	LCS-511	CP50-22	CS7-6024	LW025	LW030	
S32S-MWLNR/L08		32	22	250	40	14°	SMW-432	LCS-617	CP50-22	CS7-6030	-	LW030	
S40T-MWLNR/L08		40	27	300	50	12°	SMW-432	LCS-617	CP50-22	CS7-6030	-	LW030	
S50U-MWLNR/L08		50	35	350	63	12°	SMW-432	LCS-617	CP50-22	CS7-6030	-	LW030	
S63Y-MWLNR/L08		63	38	500	75	10°	SMW-432	LCS-617	CP50-22	CS7-6030	-	LW030	