



Order No.	Insert	Dimensions					Parts					Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF						
S16Q-PCLNR/L09	CNMG0903	16	11	180	20	14°	-	CS-LSP2	CP-LL2	CS-LS2	LW025	
S20R-PCLNR/L09		20	13	200	25	12°	-	CS-LSP2	CP-LL2	CS-LS2	LW025	
S25R-PCLNR/L09		25	17	200	32	11°	SMC-322	CS-LSP3	CP-LL3	CS-LS3	LW025	
S25R-PCLNR/L12	CNMG1204	25	17	200	32	11°	-	CS-LSP5	CP-LL5	CS-LS3	LW025	
S32S-PCLNR/L12		32	22	250	40	11°	SMC-422	CS-LSP4	CP-LL4	CS-LS4	LW030	
S40T-PCLNR/L12		40	27	300	50	10°	SMC-422	CS-LSP4	CP-LL4	CS-LS4	LW030	
S50W-PCLNR/L19		CNMG1906	50	35	450	63	10°	SMC-632	CS-LSP8	CP-LL8	CS-LS8	LW040

💧 A- Steel shank with coolant  
亦可做中心出水鋼柄

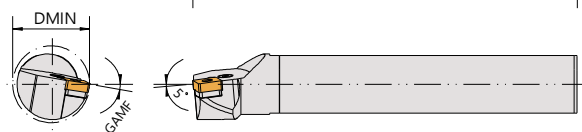

Order No.	Insert	Dimensions					Parts					Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF						
S25R-PSKNR/L12	SNMG1204	25	17	200	30	10°	-	CS-LSP5	CP-LL5	CS-LS3	LW025	
S32S-PSKNR/L12		32	22	250	40	10°	SMS-422	CS-LSP4	CP-LL4	CS-LS4	LW030	
S40T-PSKNR/L12		40	27	300	48	10°	SMS-422	CS-LSP4	CP-LL4	CS-LS4	LW030	

💧 A- Steel shank with coolant  
亦可做中心出水鋼柄