




## S-SCLP

95°






💧 A- Steel shank with coolant 亦可做中心出水鋼柄

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S08H-SCLPR/L06	CPMT0602	8	6	100	12	7°	CS25050	FT-7
S10K-SCLPR/L06		10	7	125	14	7°	CS25061S	FT-7
S12M-SCLPR/L06		12	9	150	16	6°	CS25061S	FT-7
S10K-SCLPR/L08	CPMT0802	10	7	125	14	7°	CS30070	FT-10
S10K-SCLPR/L08-12		10	6	125	12	7°	CS30070	FT-10
S12M-SCLPR/L08		12	8	150	16	6°	CS30070	FT-10
S12M-SCLPR/L08-14		12	7	150	14	6°	CS30070	FT-10
S16Q-SCLPR/L08	CPMT0903	16	9	180	18	7°	CS30070	FT-10
S12M-SCLPR/L09		12	9	150	16	12°	CS40090	FT-15
S16Q-SCLPR/L09		16	11	180	20	7°	CS40090	FT-15
S16Q-SCLPR/L09-18		16	9	180	18	7°	CS40090	FT-15
S20R-SCLPR/L09		20	13	200	25	5°	CS40090	FT-15
S20S-SCLPR/L09		20	13	250	25	5°	CS40090	FT-15
S20R-SCLPR/L09-22		20	11	200	22	5°	CS40090	FT-15
S25R-SCLPR/L09		25	17	200	32	5°	CS40090	FT-15
S25R-SCLPR/L09-28		25	14.5	200	28	5°	CS40090	FT-15
S32S-SCLPR/L09		32	22	250	40	5°	CS40090	FT-15

## S-SCZC

93°

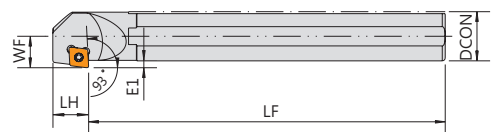

💧 A- Steel shank with coolant 亦可做中心出水鋼柄

Order No.	Insert	Dimensions(mm)							Parts	Wrench
		柄徑	工作寬度	切深	長度	最小加工徑	頭長	徑向前角		
Right / Left		DCON	WF	E1	LF	DMIN	LH	GAMF		
S08H-SCZCR/L06	CCMT0602	8	6.5	2.5	100	12	10	13°	CS25050	FT-7
S10K-SCZCR/L06		10	7.5	2.5	125	14	10	12°	CS25061S	FT-7
S12M-SCZCR/L06		12	8.5	2.5	150	16	10	10°	CS25061S	FT-7
S16Q-SCZCR/L09	CCMT09T3	16	11.5	3.5	180	21	16	10°	CS35090	FT-15
S20R-SCZCR/L09		20	13.5	3.5	200	25	18	8°	CS35090	FT-15
S25R-SCZCR/L09		25	16	3.5	200	32	18	8°	CS35090	FT-15