



S-SDQC
C-SDQC
E-SDQC

107.5°

S-Steel Shank 鋼柄
C-Carbide Shank 鎢鋼柄
E-Carbide Shank with Coolant 油孔鎢鋼柄

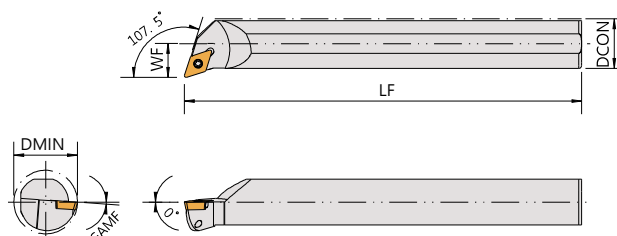

Order No.	Insert	Dimensions(mm)					Parts	Wrench
Right / Left		柄徑	工作寬度	長度	最小加工徑	徑向前角		
		DCON	WF	LF	DMIN	GAMF		
S10M-SDQCR/L07	DCMT0702	10	7	150	13	10°	CS25061S	FT-7
S12M-SDQCR/L07		12	9	150	16	8°	CS25061S	FT-7
S16Q-SDQCR/L07		16	11	180	20	6°	CS25061S	FT-7
S20R-SDQCR/L07		20	13	200	25	6°	CS25061S	FT-7
S16Q-SDQCR/L11	DCMT11T3	16	11	180	20	6°	CS35095	FT-15
S20R-SDQCR/L11		20	13	200	25	8°	CS35095	FT-15
S20S-SDQCR/L11		20	13	250	25	8°	CS35095	FT-15
S25R-SDQCR/L11		25	17	200	32	4°	CS35095	FT-15
S32S-SDQCR/L11		32	22	250	40	4°	CS35095	FT-15
S40T-SDQCR/L11		40	27	300	50	3°	CS35095	FT-15
S50U-SDQCR/L11		50	35	350	63	2°	CS35095	FT-15
C10M-SDQCR07	DCMT0702	10	7	150	13	10°	CS25061S	FT-7
C12Q-SDQCR07		12	9	180	16	7°	CS25061S	FT-7
C16R-SDQCR07		16	11	200	20	6°	CS25061S	FT-7
E10Q-SDQCR07	DCMT0702	10	7	180	13	10°	CS25061S	FT-7
E12R-SDQCR07		12	9	200	16	7°	CS25061S	FT-7
E16R-SDQCR07		16	11	200	20	6°	CS25061S	FT-7

💧 A- Steel shank with coolant
亦可做中心出水鋼柄