

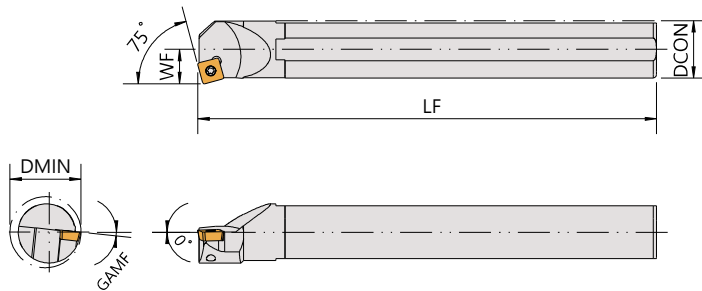


Order No.	Insert	Dimensions(mm)							Parts	Wrench
		柄徑 DCON	工作寬度 WF	切深 E1	長度 LF	最小加工徑 DMIN	頭長 LH	徑向前角 GAMF		
S10M-SDZCR/L07	DCMT0702	10	8.5	3.5	150	14	11	10°	CS25061S	FT-7
S12M-SDZCR/L07		12	10.5	4.5	150	17	11	9°		
S16Q-SDZCR/L07		16	12.5	4.5	180	21	11	8°		
S20R-SDZCR/L11	DCMT11T3	20	15.5	5.5	200	26	16	8°	CS35095	FT-15
S20S-SDZCR/L11		20	15.5	5.5	250	26	16	8°		
S25R-SDZCR/L11		25	18	5.5	200	33	20	6°		
S32S-SDZCR/L11		32	21.5	5.5	250	38	20	4°		

A- Steel shank with coolant
亦可做中心出水鋼柄



Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
S12M-SSKCR/L09	SCMT09T3	12	8.5	150	16	12°	CS40090	FT-15
S16Q-SSKCR/L09		16	11	180	20	11°		
S20R-SSKCR/L09		20	13	200	25	6°		
S25R-SSKCR/L09		25	15	200	31	6°		
S25R-SSKCR/L12	SCMT1204	25	17	200	32	7°	CS40115	FT-15
S32S-SSKCR/L12		32	22	250	40	7°		

A- Steel shank with coolant
亦可做中心出水鋼柄