





S-STWB
S-STWC
60°

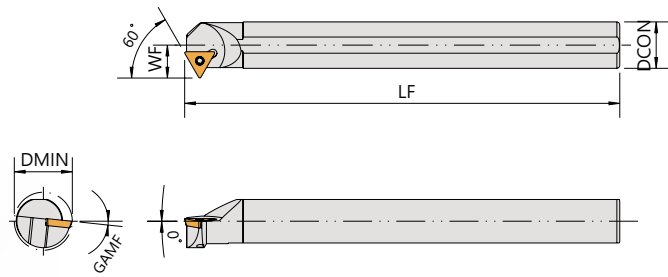

亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts	Wrench	
		柄徑	工作寬度	長度	最小加工徑	徑向前角			
Right / Left		DCON	WF	LF	DMIN	GAMF			
S08H-STWBR06	TBMT0601	8	6	100	11	13°	CS20038	FT-6	
S08H-STWCR/L09	TCMT0902	8	6	100	10	13°	CS22050	FT-7	
S10K-STWCR/L09		10	7	125	13	8°	CS22050	FT-7	
S10K-STWCR/L11	TCMT1102	10	7	125	13	8°	CS25061S	FT-7	
S12M-STWCR/L11		12	9	150	16	8°	CS25061S	FT-7	
S16Q-STWCR/L11		16	11	180	20	6°	CS25061S	FT-7	
S20R-STWCR/L11		20	13	200	25	4°	CS25061S	FT-7	
S25R-STWCR/L11		25	15	200	31	6°	CS25061S	FT-7	
S20R-STWCR/L16		TCMT16T3	20	14.5	200	25	2°	CS35090	FT-15
S25R-STWCR/L16			25	17	200	32	6°	CS35090	FT-15
S32S-STWCR/L16	32		20.5	250	39	4°	CS35090	FT-15	
S40T-STWCR/L16	40		24	300	50	0°	CS35090	FT-15	

S-STWP
60°

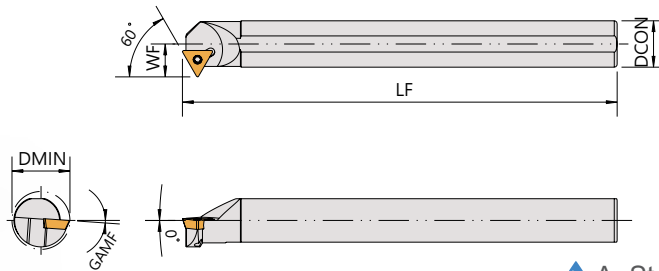

亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S08K-STWPR/L08	TPMT0802	8	6	125	11	10°	CS20045	FT-6
S08K-STWPR/L08-09		8	4.6	125	9	10°	CS20045	FT-6
S10K-STWPR/L09	TPMT0902	10	7	125	13	8°	CS25065 / CS25062S	FT-8
S10K-STWPR/L11	TPMT1103	10	7	125	13	8°	CSA30060	FT-10
S12M-STWPR/L11		12	9	150	16	5°	CSA30060	FT-10
S16Q-STWPR/L11		16	11	180	20	4°	CSA30070	FT-10
S20R-STWPR/L11		20	13	200	25	3°	CSA30070	FT-10