
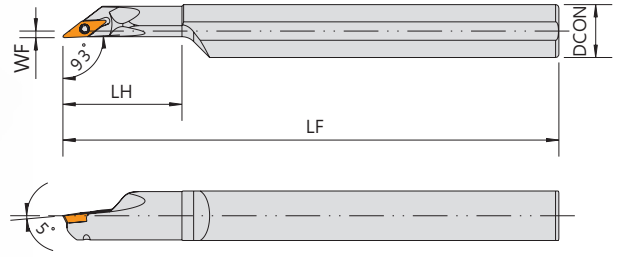






S-SVJB-E S-SVJC-E 93°



💧 A- Steel shank with coolant 亦可做中心出水鋼柄

Order No.	Insert	Dimensions(mm)						Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	頭長 LH	徑向前角 GAMF		
S20R-SVJBR11-25E	VBMT1103	20	2	200	25	38	5°	CS25061S	FT-7
S25R-SVJBR11-30E		25	2	200	30	45.5	5°		
S32S-SVJBR16-40E	VBMT1604	32	2	250	40	60.5	5°	CS35090	FT-15
S12M-SVJCR08-16E	VCMT0802	12	2	150	16	26.5	5°	CS20047	FT-6
S16Q-SVJCR08-20E		16	2	180	20	36.5	5°		

S-SVJC 93°

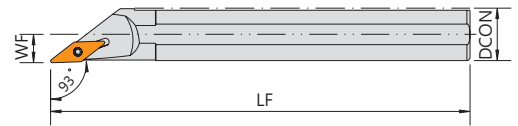

💧 A- Steel shank with coolant 亦可做中心出水鋼柄

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
S08K-SVJCR08	VCMT0802	8	5	125	10	7°	CS20047	FT-6
S10K-SVJCR08		10	6	125	12	7°		
S10K-SVJCR/L11	VCMT1103	10	6	125	12	10°	CS25061S	FT-7
S12M-SVJCR/L11		12	7	150	14	7°		
S16Q-SVJCR/L11		16	9	180	18	7°		
S16Q-SVJCR/L16	VCMT1604	16	9	180	18	7°	CS35090	FT-15
S20R-SVJCR/L16		20	10.5	200	21	6°		
S25R-SVJCR/L16		25	13.5	200	27	6°		
S32S-SVJCR/L16		32	17	250	34	4°		
S40T-SVJCR/L16		40	22	300	44	4°		