



S-SVQB S-SVQC 107.5°

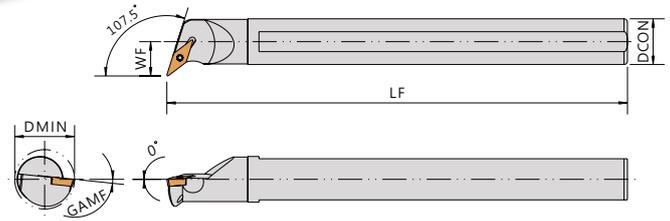

💧 A- Steel shank with coolant 亦可做中心出水鋼柄

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
Right / Left								
S12M-SVQBR/L11	VBMT1103	12	11	150	18	6°	CS25055PS	FT-7
S16Q-SVQBR/L11		16	13	180	22	6°	CS25055PS	FT-7
S20R-SVQBR/L11		20	15	200	26	6°	CS25061S	FT-7
S20R-SVQBR/L16	VBMT1604	20	19	200	30	8°	CS35119S	FT-15
S25R-SVQBR/L16		25	20.5	200	34	4°	CS35119S	FT-15
S32S-SVQBR/L16		32	22.5	250	40	8°	CS35119S	FT-15
S40V-SVQBR/L16		40	27	400	48	6°	CS35119S	FT-15

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
Right / Left								
S12M-SVQCR/L11	VCMT1103	12	11	150	18	10°	CS25061S	FT-7
S16Q-SVQCR/L11		16	13	180	22	7°	CS25061S	FT-7
S20R-SVQCR/L11		20	15	200	27	6°	CS25061S	FT-7
S20R-SVQCR/L16	VCMT1604	20	19	200	30	8°	CS35090	FT-15
S25R-SVQCR/L16		25	20.5	200	34	4°	CS35090	FT-15
S32S-SVQCR/L16		32	22.5	250	41	8°	CS35090	FT-15
S40T-SVQCR/L16		40	27	300	50	6°	CS35090	FT-15