




Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
S12M-SVPBR/L11	VBMT1103	12	11	150	18	10°	CS25060	FT-7
S16Q-SVPBR/L11		16	13	180	23	7°	CS25060	FT-7
S20R-SVPBR/L11		20	15	200	26	6°	CS25060	FT-7

💧 A- Steel shank with coolant 亦可做中心出水鋼柄

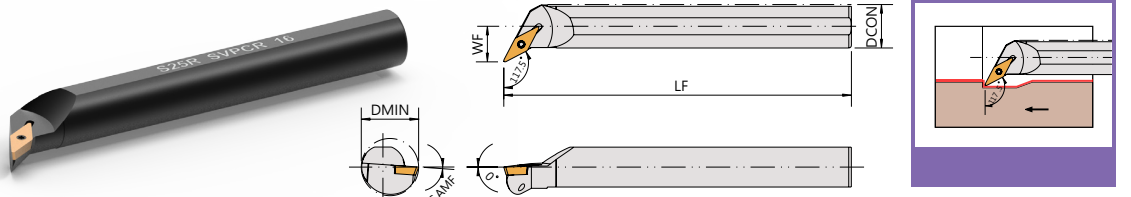

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
S12M-SVPCR/L11	VCMT1103	12	11	150	18	10°	CS25060	FT-7
S16Q-SVPCR/L11		16	13	180	22	7°	CS25060	FT-7
S20R-SVPCR/L11		20	15	200	27	6°	CS25060	FT-7
S20R-SVPCR/L16	VCMT1604	20	19	200	30	8°	CS35090	FT-15
S25R-SVPCR/L16		25	20.5	200	34	4°	CS35090	FT-15
S32S-SVPCR/L16		32	22.5	250	41	8°	CS35090	FT-15
S40T-SVPCR/L16		40	27	300	50	6°	CS35090	FT-15

💧 A- Steel shank with coolant 亦可做中心出水鋼柄

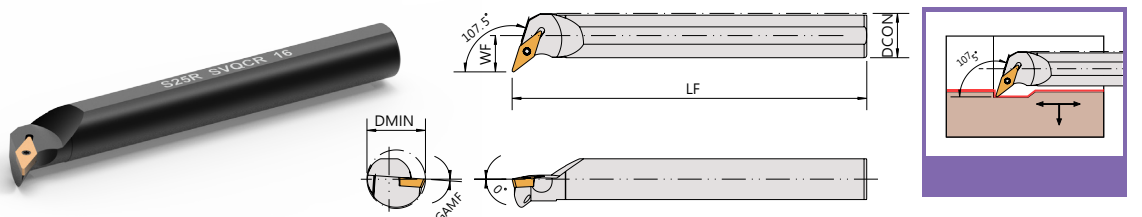

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑 DCON	工作寬度 WF	長度 LF	最小加工徑 DMIN	徑向前角 GAMF		
S12M-SVQCR/L11	VCMT1103	12	11	150	18	10°	CS25060	FT-7
S16Q-SVQCR/L11		16	13	180	22	7°	CS25060	FT-7
S20R-SVQCR/L11		20	15	200	27	6°	CS25060	FT-7
S20R-SVQCR/L16	VCMT1604	20	19	200	30	8°	CS35090	FT-15
S25R-SVQCR/L16		25	20.5	200	34	4°	CS35090	FT-15
S32S-SVQCR/L16		32	22.5	250	41	8°	CS35090	FT-15
S40T-SVQCR/L16		40	27	300	50	6°	CS35090	FT-15

💧 A- Steel shank with coolant 亦可做中心出水鋼柄