
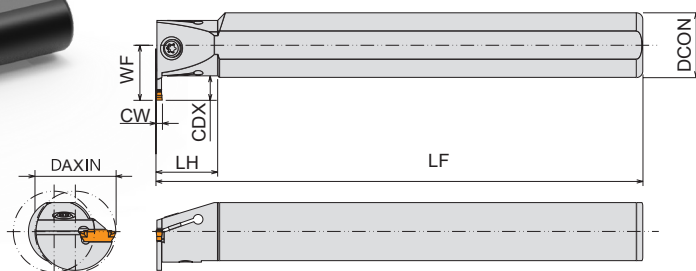


GNDISR



▼ Recommended Inserts 建議刀片品牌：SUMITOMO

Order No.	Insert	Dimensions(mm)							Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	頭長	切寬	最大切深		
Right / Left		DCON	WF	LF	DAXIN	LH	CW	CDX		
GNDISR1013-T2030	GXMN20	10	8	125	13	25	2	3	CS40090	TL-15
GNDISR1214-T2036		12	10	150	14	30	2	3.6	CS40090	TL-15
GNDISR1616-T2036		16	11.5	160	16	35	2	3.6	CS50100	TL-20N
GNDISR1620-T2046		16	13	160	20	40	2	4.6	CS50100	TL-20N
GNDISR1214-T3040	GXMN30	12	10.5	150	14	30	3	4	CS40090	TL-15
GNDISR1616-T3036		16	11.5	160	16	35	3	3.6	CS50100	TL-20N
GNDISR1620-T3050		16	13.5	160	20	40	3	5	CS50100	TL-20N
GNDISR1013-T2030B	GXMN20	10	8	125	13	15	2	3	CS40090	TL-15
GNDISR1214-T2036B		12	10	125	14	15	2	3.6	CS40090	TL-15
GNDISR1616-T2036B		16	11.5	125	16	20	2	3.6	CS50100	TL-20N
GNDISR1620-T2046B		16	13	125	20	20	2	4.6	CS50100	TL-20N
GNDISR2025-T2066B		20	17	150	25	20	2	6.6	CS50100	TL-20N
GNDISR1214-T3036B	GXMN30	12	10	125	14	15	3	3.6	CS40090	TL-15
GNDISR1214-T3040B		12	10.5	125	14	15	3	4	CS40090	TL-15
GNDISR1616-T3036B		16	11.5	125	16	15	3	3.6	CS50100	TL-20N
GNDISR1620-T3046B		16	13	125	20	20	3	4.6	CS50100	TL-20N
GNDISR1620-T3050B		16	13.5	125	20	20	3	5	CS50100	TL-20N
GNDISR2025-T3066B		20	17	150	25	20	3	6.6	CS50100	TL-20N

*GNDISR with coolant 含油孔 / GNDISR-B without coolant 無油孔