

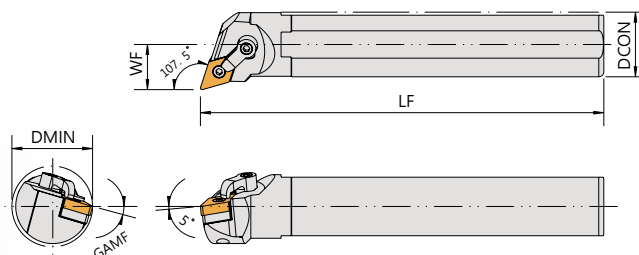


S-MDQN

107.5°





Order No.	Insert	Dimensions(mm)					Parts				Wrench
Right / Left		柄徑	工作寬度	長度	最小加工徑	徑向前角					
		DCON	WF	LF	DMIN	GAMF					
S25R-MDQNR/L1504	DNMG1504	25	17	200	32	15°	SMD-443	LCS-617	CP50-24	CS7-6024	LW030
S32S-MDQNR/L15	DNMG1504-SMD463 DNMG1506-SMD443	32	22	250	40	17°	SMD-4X3	LCS-619	CP50-24	CS7-6024	LW030
S40T-MDQNR/L15		40	27	300	50	15°	SMD-4X3	LCS-619	CP50-24	CS7-6030	LW030
S50U-MDQNR/L15		50	35	350	63	12°	SMD-4X3	LCS-619	CP50-24	CS7-6030	LW030

💧 A- Steel shank with coolant
亦可做中心出水鋼柄

S-MDUN

93°

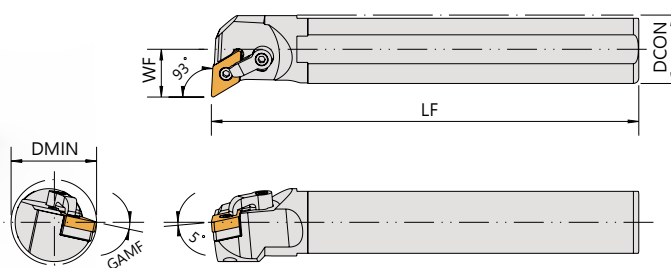

Order No.	Insert	Dimensions(mm)					Parts				Wrench
Right / Left		柄徑	工作寬度	長度	最小加工徑	徑向前角					
		DCON	WF	LF	DMIN	GAMF					
S25R-MDUNR/L1504	DNMG1504	25	17	200	32	15°	-	LCS-511	CP50-24	CS7-6024	LW030
S32S-MDUNR/L15	DNMG1504-SMD463 DNMG1506-SMD443	32	22	250	40	17°	SMD-4X3	LCS-617	CP50-24	CS7-6024	LW030
S40T-MDUNR/L15		40	27	300	50	15°				CS7-6030	
S50U-MDUNR/L15		50	35	350	63	12°				CS7-6030	

💧 A- Steel shank with coolant
亦可做中心出水鋼柄