

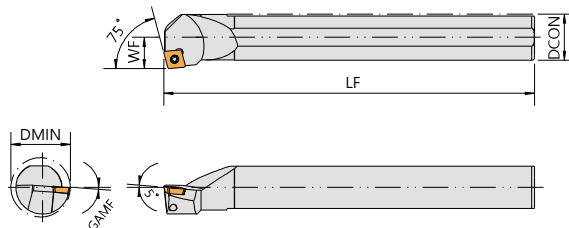


亦可做中心出水鋼柄  
 A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S08H-SCKCR/L06	CCMT0602	8	6	100	12	13°	CS25050	FT-7
S10K-SCKCR/L06		10	7	125	14	12°	CS25061S	FT-7
S12M-SCKCR/L06		12	9	150	16	9°	CS25061S	FT-7
S16Q-SCKCR/L06		16	9.5	180	20	7°	CS25061S	FT-7
S12M-SCKCR/L09	CCMT09T3	12	8	150	16	13°	CS35075	FT-15
S16Q-SCKCR/L09		16	11	180	20	9°	CS35090	FT-15
S20R-SCKCR/L09		20	13	200	25	7°	CS35090	FT-15
S25R-SCKCR/L09		25	17	200	32	5°	CS35090	FT-15



亦可做中心出水鋼柄  
 A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S08H-SCKPR/L06	CPMT0602	8	6	100	10	10°	CS25050	FT-7
S10K-SCKPR/L06		10	7	125	13	8°	CS25061S	FT-7
S12M-SCKPR/L06		12	9	150	16	6°	CS25061S	FT-7
S16Q-SCKPR/L06		16	11	180	20	6°	CS25061S	FT-7
S12M-SCKPR/L09	CPMT0903	12	9	150	16	6°	CS40090	FT-15
S16Q-SCKPR/L09		16	11	180	20	4°	CS40090	FT-15
S20R-SCKPR/L09		20	13	200	25	4°	CS40090	FT-15
S25R-SCKPR/L09		25	17	200	32	4°	CS40090	FT-15