


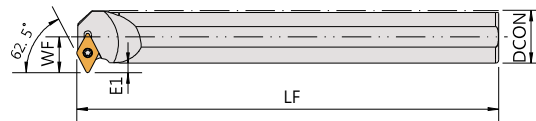



亦可做中心出水鋼柄  
 A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S08K-SDJCR/L07	DCMT0702	8	5	125	11	10°	CS25050	FT-7
S10M-SDJCR/L07		10	6	150	13	10°	CS25061S	FT-7
S12M-SDJCR/L07		12	7	150	19	10°	CS25061S	FT-7
S16Q-SDJCR/L07		16	9.5	180	23	8°	CS25061S	FT-7
S16Q-SDJCR/L11	DCMT11T3	16	9.5	180	23	8°	CS35095	FT-15
S20R-SDJCR/L11		20	11.5	200	27	6°	CS35095	FT-15
S25R-SDJCR/L11		25	14	200	32	4°	CS35095	FT-15
S32S-SDJCR/L11		32	17.5	250	40	2°	CS35095	FT-15



亦可做中心出水鋼柄  
 A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)						Parts	Wrench
		柄徑	工作寬度	切深	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	E1	LF	DMIN	GAMF		
S10K-SDWCR/L07	DCMT0702	10	9.5	4.5	125	17	12°	CS25061S	FT-7
S12M-SDWCR/L07		12	10.5	4.5	150	19	10°	CS25061S	FT-7
S16Q-SDWCR/L07		16	12.5	4.5	180	23	8°	CS25061S	FT-7
S20R-SDWCR/L07		20	14.5	4.5	200	27	6°	CS25061S	FT-7
S16Q-SDWCR/L11	DCMT11T3	16	12.5	4.5	180	23	8°	CS35095	FT-15
S20R-SDWCR/L11		20	14.5	4.5	200	27	6°	CS35095	FT-15
S20T-SDWCR/L11		20	14.5	4.5	300	27	6°	CS35095	FT-15
S25R-SDWCR/L11		25	17	4.5	200	32	4°	CS35095	FT-15
S32S-SDWCR/L11		32	20	4	250	40	2°	CS35095	FT-15