



S-SDUC
C-SDUC
E-SDUC

93°

S-Steel Shank 鋼柄
C-Carbide Shank 鎢鋼柄
E-Carbide Shank with Coolant 油孔鎢鋼柄

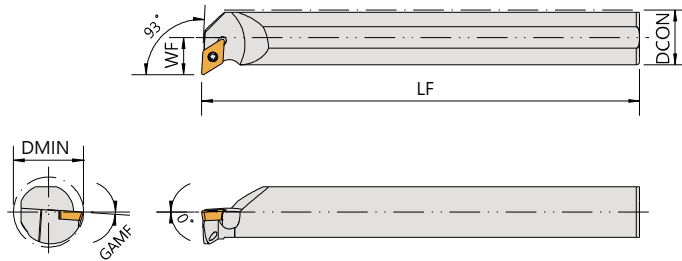

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S10M-SDUCR/L07	DCMT0702	10	7	150	13	10°	CS25061S	FT-7
S12M-SDUCR/L07		12	9	150	16	8°	CS25061S	FT-7
S16Q-SDUCR/L07		16	11	180	20	6°	CS25061S	FT-7
S20R-SDUCR/L07		20	13	200	25	5°	CS25061S	FT-7
S16Q-SDUCR/L11	DCMT11T3	16	11	180	20	7°	CS35095	FT-15
S20R-SDUCR/L11		20	13	200	25	8°	CS35095	FT-15
S20S-SDUCR/L11		20	13	250	25	8°	CS35095	FT-15
S25R-SDUCR/L11		25	17	200	32	4°	CS35095	FT-15
S32S-SDUCR/L11		32	22	250	40	4°	CS35095	FT-15
S40T-SDUCR/L11		40	27	300	50	2°	CS35095	FT-15
C10M-SDUCR07	DCMT0702	10	7	150	13	10°	CS25061S	FT-7
C12Q-SDUCR07		12	9	180	16	8°	CS25061S	FT-7
C16R-SDUCR07		16	11	200	20	6°	CS25061S	FT-7
C16R-SDUCR11	DCMT11T3	16	11	200	20	7°	CS35095	FT-15
C20S-SDUCR11		20	13	250	25	8°	CS35095	FT-15
C25T-SDUCR11		25	17	300	32	4°	CS35095	FT-15
E10Q-SDUCR07	DCMT0702	10	7	180	13	10°	CS25061S	FT-7
E12R-SDUCR07		12	9	200	16	8°	CS25061S	FT-7
E16R-SDUCR07		16	11	200	20	6°	CS25061S	FT-7
E20S-SDUCR11	DCMT11T3	20	13	250	25	8°	CS35095	FT-15
E25T-SDUCR11		25	17	300	32	4°	CS35095	FT-15

A- Steel shank with coolant
亦可做中心出水鋼柄