




S-SSSC

45°

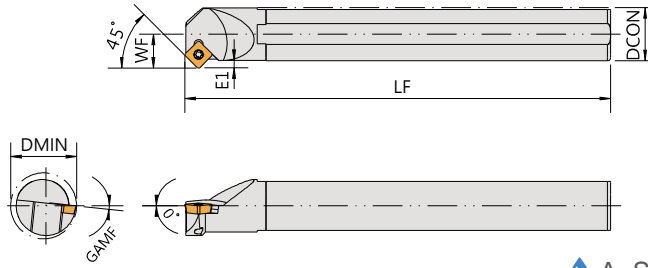



亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)						Parts	Wrench
		柄徑	工作寬度	切深	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	E1	LF	DMIN	GAMF		
S12M-SSSCR/L09	SCMT09T3	12	8.5	2.5	150	16	12°	CS40090	FT-15
S16Q-SSSCR/L09		16	11.5	3.5	180	20	10°	CS40090	FT-15
S20R-SSSCR/L09		20	13.5	3.5	200	26	8°	CS40090	FT-15
S25R-SSSCR/L09		25	16	3.5	200	31	6°	CS40090	FT-15



S-STFC

91°

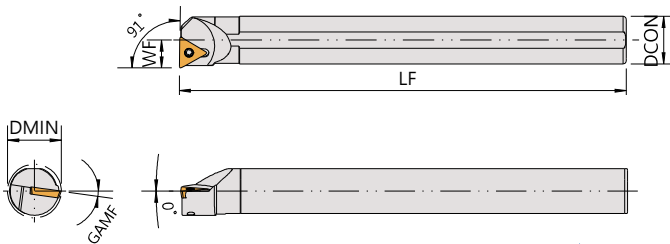

亦可做中心出水鋼柄
A- Steel shank with coolant

Order No.	Insert	Dimensions(mm)					Parts	Wrench	
		柄徑	工作寬度	長度	最小加工徑	徑向前角			
Right / Left		DCON	WF	LF	DMIN	GAMF			
S08H-STFCR/L09	TCMT0902	8	6	100	12	15°	CS22050	FT-7	
S10K-STFCR/L09		10	7	125	14	15°	CS22050	FT-7	
S12M-STFCR/L09		12	9	150	16	10°	CS22050	FT-7	
S10K-STFCR/L11	TCMT1102	10	7	125	14	12°	CS25061S	FT-7	
S12M-STFCR/L11		12	9	150	16	10°	CS25061S	FT-7	
S12M-STFCR/L11-14		12	7	150	14	10°	CS25061S	FT-7	
S16Q-STFCR/L11		16	11	180	20	6°	CS25061S	FT-7	
S16Q-STFCR/L11-18		16	9	180	18	8°	CS25061S	FT-7	
S20R-STFCR/L11		20	13	200	25	3°	CS25061S	FT-7	
S20S-STFCR/L11		20	13	250	25	3°	CS25061S	FT-7	
S20R-STFCR/L16		TCMT16T3	20	13	200	25	8°	CS35090	FT-15
S20S-STFCR/L16			20	13	250	25	8°	CS35090	FT-15
S25R-STFCR/L16			25	17	200	32	6°	CS35090	FT-15
S32S-STFCR/L16	32		22	250	39	4°	CS35090	FT-15	