

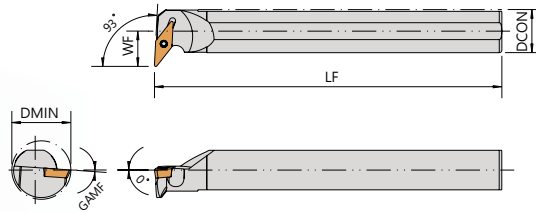


S-SVUB
S-SVUC

93°

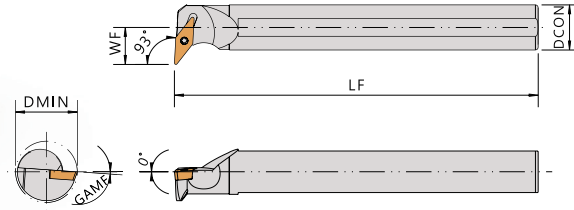

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S16Q-SVUBR/L11	VBMT1103	16	13	180	22	7°	CS25061S	FT-7
S20R-SVUBR/L11		20	15	200	27	6°	CS25061S	FT-7
S25R-SVUBR/L11		25	20.5	200	33	4°	CS25061S	FT-7
S20R-SVUBR/L16	VBMT1604	20	19	200	31	8°	CS35090	FT-15
S25R-SVUBR/L16		25	20.5	200	34	4°	CS35090	FT-15
S32S-SVUBR/L16		32	22.5	250	42	8°	CS35090	FT-15
S32U-SVUBR/L16		32	22.5	350	42	8°	CS35090	FT-15
S40V-SVUBR/L16		40	27	400	51	6°	CS35090	FT-15
S50V-SVUBR/L16		50	32	400	58	6°	CS35090	FT-15

Order No.	Insert	Dimensions(mm)					Parts	Wrench
		柄徑	工作寬度	長度	最小加工徑	徑向前角		
Right / Left		DCON	WF	LF	DMIN	GAMF		
S12M-SVUCR/L08	VCMT0802	12	11	150	22	7°	CS20047	FT-6
S16Q-SVUCR/L11	VCMT1103	16	13	180	22	7°	CS25061S	FT-7
S20R-SVUCR/L11		20	15	200	27	6°	CS25061S	FT-7
S25R-SVUCR/L11		25	20.5	200	33	4°	CS25061S	FT-7
S20R-SVUCR/L16	VCMT1604	20	19	200	31	8°	CS35090	FT-15
S25R-SVUCR/L16		25	20.5	200	33	7°	CS35090	FT-15
S32S-SVUCR/L16		32	22.5	250	42	5°	CS35090	FT-15
S40T-SVUCR/L16		40	27	300	51	4°	CS35090	FT-15

A- Steel shank with coolant
亦可做中心出水鋼柄