




TSSP4



Positive

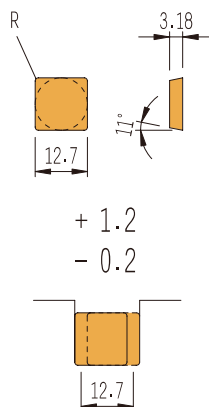

For indexable inserts
SP 1203

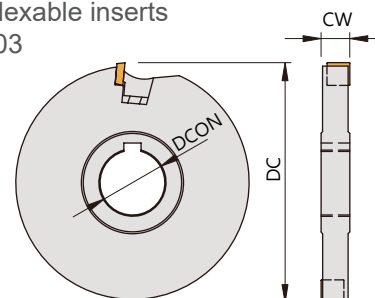

- ◎ Machine steel ◎ Cast iron. Non-ferrous application.
- ◎ General purpose cutter.
- ◎ Can be used as double side mills.
- ◎ Can be adjustable for -0.2mm to +1.2mm
- ▼ Recommended Inserts 刀片建議品牌: SUMITOMO

Order No.	Insert	Dimensions(mm)					Insert Clamp	Locking Screw	Clamp Screw	Wrench
Right / Left		刀徑 DC	切寬 CW	孔徑 DCON	孔徑 DCON(inch)	刃數 I No.				
TSSP410016	SP..1203	100	16	27	1"	8	CP50-9	CS7-6016	CS70-7	LW020 LW025 LW030
TSSP410018		100	18	27	1"	8				
TSSP412516		125	16	32	1-1/4"	12				
TSSP412518		125	18	32	1-1/4"	12				
TSSP412520		125	20	32	1-1/4"	12				
TSSP416016		160	16	32	1-1/4"	16				
TSSP416018		160	18	32	1-1/4"	16				
TSSP416020		160	20	32	1-1/4"	16				
TSSP417516		175	16	40	1-1/2"	18				
TSSP417518		175	18	40	1-1/2"	18				
TSSP417520		175	20	40	1-1/2"	18				
TSSP420016		200	16	40	1-1/2"	20				
TSSP420018		200	18	40	1-1/2"	20				
TSSP420020		200	20	40	1-1/2"	20				
TSSP425016		250	16	50	2"	24				
TSSP425018		250	18	50	2"	24				
TSSP425020		250	20	50	2"	24				

▼ Inserts 刀片:

●: Stock / ◎: 1st Choice, ○: 2nd Choice, X: Not Recommend

Tolerance Class 精度	P	鋼 Carbon Steels		◎					
	M	不鏽鋼 Stainless Steels			◎				
M級	K	鑄鐵 Cast Iron	◎						
Specification 規格			Grade 材質			Dimensions(mm) 尺寸			
			AK201	AP251	TM351	IC	t	α	r
SPMN120308			●	●	●	12.7	3.18	11	0.8